www.leantechnik.ru leantechnik.ru +7 (499) 703-40-85

## Product overview accessories lifgo® & lean SL® (identical)






- Article numbers gearboxes
- Article numbers accessories

Product overview accessories lifgo® & lean SL® (identical)

Article numbers



# Product overview

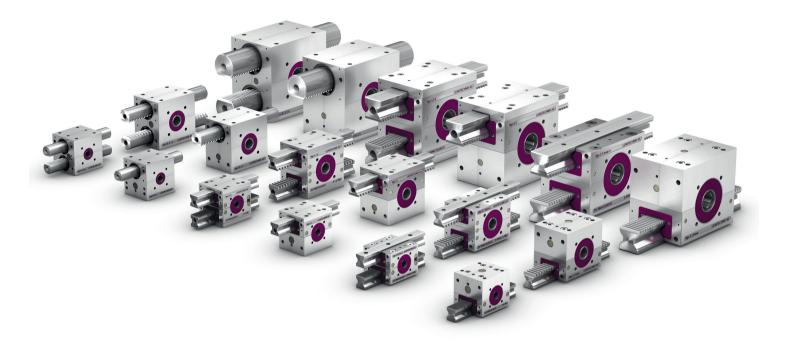




Im Lipperfeld 7c 46047 Oberhausen, Germany

Phone +49 (0)208 495 250 Fax +49 (0)208 495 2518

Email info@leantechnik.com www.leantechnik.com

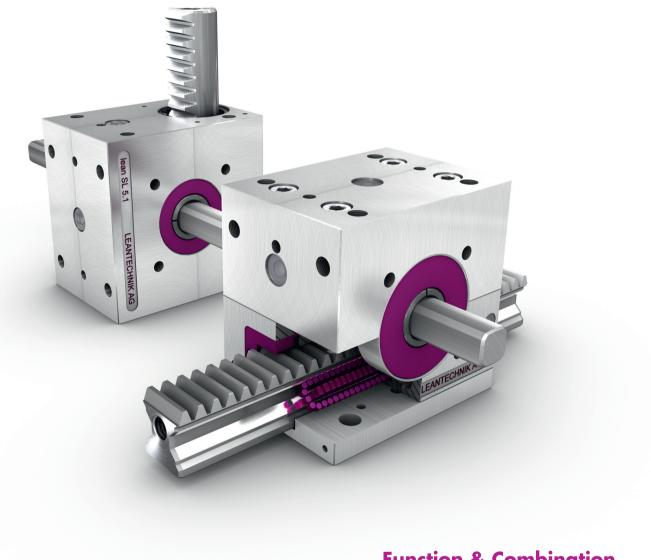

Function & Combination Applications & Examples lifgo® & lean SL®

Our products are subject to continuous further development.

We reserve the right to make technical changes that support product improvements.

© LEANTECHNIK AG / patented and utility patent no. 296 15 825.9.

Reproduction of any kind, in whole or in part, requires written permission.

# Overview of lifgo® + lean SL®

- Gearbox variants
- identical accessories

These accessory parts are identical for lifgo® and lean SL®.

For more information on sizes and item numbers, see the PDF catalogue.

Our products are subject to continuous further development. We reserve the right to make technical changes that support product improvements. © LEANTECHNIK AG / patented and utility patent no. 296 15 825.9. Reproduction of any kind, in whole or in part, requires written permission.

www.leantechnik.ru +7 (499) 703-40-85

Overview of lifgo® + lean SL® • Gearbox variants & identical accessories Key to lifgo® overview Get an overview of your options. Key to lean SL® overview Size 5.1 is used in the illustrations as a reference.

No.	Product
1	lifgo® double
2	lifgo®
3	lifgo® linear double
4	lifgo® linear
5	Coupling unit
6	Differential coupling
7	Mechanical arrest system (ASS)
8	Gear rack protection
9	End plate
10	Gear rack retaining plate AZ
11	Shaft adapter variant 2
12	Shaft adapter variant 1
13	Profile shaft adapter
14	Universal joint with profile shaft
15	Universal joint double
16	Universal joint single
17	Set collar
18	Profile shaft
19	Sliding sleeves
20	Rotational reinforcement
21	Coupling
22	Drive shaft
23	Gearbox bell
24	Gearbox flange

No.	Product
1	lean SL® double
2	lean SL®
3	Coupling unit
4	Differential coupling
5	Mechanical arrest system (ASS)
6	Gear rack protection
7	End plate
8	Gear rack retaining plate AZ
9	Shaft adapter variant 2
10	Shaft adapter variant 1
11	Profile shaft adapter
12	Universal joint with profile shaft
13	Universal joint double
14	Universal joint single
15	Set collar
16	Profile shaft
17	Sliding sleeves
18	Rotational reinforcement
19	Coupling
20	Drive shaft
21	Gearbox bell
22	Gearbox flange

## Product overview lifgo® • Article numbers gearboxes

lifgo®	5.0		5.1		5.3		5.4	
	Standard	Excenter	Standard	Excenter	Standard	Excenter	Standard	Excenter
Gear unit version	Item no.	Item no.	Item no.	Item no.	Item no.	Item no.	Item no.	ltem no.
lifgo® profile shaft (PVV)	500 001	500 017	500 002 501 002	500 018	500 003 501 003	500 019	500 004 501 004	
lifgo® shaft – one side (ZA 1)	500 005	500 021	500 006 501 006	500 022 501 022	500 007 501 007	500 023 501 023	500 008 501 008	500 024 501 024
lifgo® shaft – both sides (ZA 2)	500 009	500 025	500 010 501 010	500 026 501 026	500 011 501 011	500 027 501 027	500 012 501 012	500 028 501 028
lifgo® hollow keyway (PFN)	500 013	500 029	500 014 501 014	500 030 501 030	500 015 501 015	500 031 501 031	500 016 501 016	500 032 501 032
lifgo® linear profile shaft (PW)	500 033	500 049	500 034 501 034	500 050	500 035 501 035	500 051	500 040 501 036	
lifgo® linear shaft – one side (ZA 1)	500 037	500 053	500 038 501 038	500 054 501 054	500 039 501 039	500 055 501 055	500 044 501 040	500 056 501 056
lifgo® linear shaft – both sides (ZA 2)	500 041	500 057	500 042 501 042	500 058 501 058	500 043 501 043	500 059 501 059	500 048 501 044	500 060 501 060
lifgo® linear hollow keyway (PFN)	500 045	500 061	500 046 501 046	500 062 501 062	500 047 501 047	500 063 501 063	500 048 501 048	500 064 501 064
lifgo® double profile shaft (PVV)	500 065		500 066 501 066		500 067 501 067		500 068 501 068	
lifgo® double shaft – one side (ZA 1)	500 069		500 070 501 070		500 071 501 071		500 072 501 072	
lifgo® double shaft – both sides (ZA 2)	500 073		500 074 501 074		500 075 501 075		500 076 501 076	
lifgo® double hollow keyway (PFN)	500 077		500 078 501 078		500 079 501 079		500 080 501 080	
lifgo® linear double profile shaft (PW)	500 081		500 082 501 082		500 083 501 083		500 084 501 084	
lifgo® linear double shaft – one side (ZA 1)	500 085		500 086 501 086		500 087 501 087		500 088 501 088	
lifgo® linear double shaft – both sides (ZA 2)	500 089		500 090 501 090		500 091 501 091		500 092 501 092	
lifgo® linear double hollow keyway (PFN)	500 093		500 094 501 094		500 095 501 095		500 096 501 096	

## All item numbers in GREY are helical-cut gears (SVZ).

For more information on sizes and item numbers, see the PDF catalogue.

## Product overview lifgo® • Article numbers accessories

lifgo®	5.0	5.1	5.3	5.4
Accessory version	Item no.	Item no.	ltem n.o.	ltem no.
lifgo® gear rack	500 113	500 114 501 106	500 115 501 107	500 116 501 108
lifgo® gear rack ground	500 504	500 505 501 114	500 506 501 115	500 637 501 116
lifgo® gear rack hardened & ground	500 169	500 170 501 122	500 171 501 123	500 1 <i>7</i> 2 501 124
lifgo® linear gear rack	500 117	500 118 501 110	500 119 501 111	500 120 501 112
lifgo® linear gear rack ground	500 507	500 508 501 118	500 509 501 119	500 638 501 120
lifgo® linear gear rack hardened & ground	500 173	500 174 501 126	500 175 501 127	500 176 501 128
lifgo® gear rack protection	500 121	500 122	500 123	500 124
lifgo® gear rack protection SB	500 510	500 511	500 512	500 854
lifgo® linear gear rack protection	500 125	500 126	500 127	500 128
lifgo® linear gear rack protection SB	500 516	500 517	500 518	500 855
lifgo® end plate	500 539	500 541	500 543	500 881
lifgo® linear end plate	500 540	500 542	500 544	500 882
lifgo® gear rack retaining plate AZ	500 181	500 182	500 183	500 184
lifgo® guide car	500 097	500 098	500 099	500 100
lifgo® compensating block	500 883	500 8845	500 885	500 888
lifgo® guide rail	500 101	500 102	500 103	500 104
lifgo® guide rail screws from top	500 105	500 106	500 107	500 108
lifgo® guide rail screws from bottom	500 109	500 110	500 111	500 112

#### All item numbers in GREY are helical-cut gears (SVZ).

For more information on sizes and item numbers, see the PDF catalogue.

## **Product overview lean SL®** Article numbers gearboxes

lean SL®	SL 5.m	SL 5.0	SL 5.1	SL 5.3	SL 5.5
Gear unit version	Item no.	ltem no.	ltem no.	ltem no.	ltem no.
lean SL® profile shaft (PW)	500 664	500 129	500 130	500 131	500 132
lean SL® shaft – one side (ZA 1)	500 665	500 133	500 134	500 135	500 136
lean SL® shaft – both sides (ZA 2)	500 666	500 137	500 138	500 139	500 140
lean SL® hollow keyway (PFN)	500 667	500 141	500 142	500 143	500 144
lean SL® double profile shaft (PW)	500 668	500 145	500 146	500 147	500 148
lean SL® double shaft – one side (ZA 1)	500 669	500 149	500 150	500 151	500 152
lean SL® double shaft – both sides (ZA 2)	500 670	500 153	500 154	500 155	500 156
lean SL® double hollow keyway (PFN)	500 671	500 157	500 158	500 159	500 160

## **Product overview lean SL®●** Article numbers accessories

ean SL®	SL 5.m	SL 5.0	SL 5.1	SL 5.3	SL 5.5
Accessory version	Item no.	Item no.	Item no.	Item no.	
ean SL® gear rack	500 672	500 161	500 162	500 163	500 164
ean SL® gear rack protection	501 354	500 177	500 178	500 179	500 180
ean SI® end plate	501 357	500 548	500 549	500 550	501 201
ean SL® gear rack retaining plate AZ	500 358	500 185	500 186	500 18 <i>7</i>	500 188

For more information on sizes and item numbers, see the PDF catalogue.

## Our understanding of service

Qualitatively high-standard products and the highest possible level of service are important to us to secure our market position as a technological leader in the development and construction of linearly mounted rack-and-pinion hoist gear units for automation technology.

Petra Trojahn and Reinhard Janzen – Executive Board, LEANTECHNIK AG






#### Our goal is to provide the best possible service for our customers

To achieve this, we know that we have to ensure smooth production processes. We help you implement and structure your system. Our rack drives will make your processes more efficient. We supply individual consultations and conceptual designs for the challenges you face. Our quality policy is part of our company philosophy.

#### We are there for you!

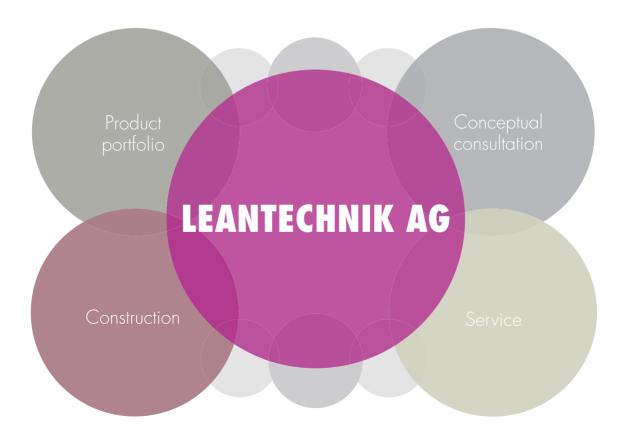

## Our understanding of service



# Conceptual Consultation


#### Our service portfolio

Our product portfolio is made up of the two gear series lifgo® and leanSL® as well as the leantranspo® product line, which includes partial and functionally complete systems for automation technology. To accompany our high-quality products, we offer comprehensive services. Our ultimate goal is to ensure maximum customer satisfaction and utility.

#### **Conceptual Consultation**

Our product range includes comprehensive conceptual and, above all, individual consultation. This begins with finding a solution for a specific problem, all the way to developing an innovative system or solution for various use cases. Throughout the process, we place great importance on the subject-related, methodological and social competence of our employees.





#### **Construction**

Comprehensive support and expert consultation is critical, especially during construction. This is why our construction team is trained to provide outstanding support while solving standardised and individual problems. New challenges and innovative products are what make the expert competence of our design engineers consistently stand out and they are constantly improving.

#### **Service**

When they buy our products, our customers profit from our comprehensive range of services as well. Whether during assembly and implementation of systems and products or our customer service, the customer is always at the centre for us and profits from the reliable support they receive from our internal and external employees. Have a question about our services? We are always available for any queries. Your contact person will be happy to help.

**Contents** 

#### **Contents**

Introduction	4
Using this manual	5
References (sample)	6
The Generation 5 lifgo® & lean SL® - Rack-and-pinion gear unit	7 – 10
Function & Combination	11 – 19
Applications & Examples	21 – 37
lifgo® & lean SL® • Technical Data	39 – 45

Our full and up-to-date PDF catalogue in its latest version with links to information and 3D models, as well as dimension sheets and accessories, can be found at: www.leantechnik.com

#### Introduction

Dear reader or user,

Whenever synchronous, precise, fast, and high-performance motion is required, our lifgo® and lean SL® rack and pinion gear units are reliable, proven functional components in a variety of industry sectors.

Below, we present the product series and the new accessories available for our gear units. The various operating options and the increased number of available item combinations are just a few of the benefits offered by our modular system, which we intend to extend still further in the coming years.

In addition to our **lifgo®** and **lean SL®** series of gear units, we also provide functional units and partial and turnkey systems, which are sold in all variations under the **leantranspo®** name. Here, our individualized approach to manufacturing in combination with a modular system brings many advantages.

Get a picture of the multifaceted possibilities for applications and combinations. The modular construction of our products allows countless variants, which are presented here in excerpts and examples. This product overview has been extended to include a variety of technical data. Accessories such as the compensating block for guide cars and the mechanical arrest system have also been included in the product portfolio.

Do not hesitate to visit our website and look at our PDF catalogue to find further information on ways of solving a range of lifting and synchronisation tasks. You can find all the detailed information here:

#### www.leantechnik.com

Our website has videos showing our gear units in numerous applications. In addition to the application examples, you can also explore the function and installation of our products in animated pictures.

The "Download" area also has 3D data and models of the products for download in various file formats.

#### The LEANTECHNIK AG Team

Our team is ready to support you in implementing your ideas. Call us or make an appointment to discuss your individual lifting and transfer application with us.

We hope that you will find our product range of interest and look forward to hearing from you. Our catalogue will give you an initial overview of our products and services. We will be happy to assist you in any way in finding a solution for your individual lifting application.

Your LEANTECHNIK AG Team

Quality Management Certification in accordance with DIN EN ISO 9001 Registration no. 254883 QM ff.

## Using this overview

To ensure clarity and ease of use, there are just a few graphic symbols and styles that will help you navigate through this product overview:

1. Sign



Important assembly, safety and functional information as well as information on dimension sheets and tables.

2. Coloured type

Indicates important information in the text.

#### Applications, designs and service

The applications and designs presented below are by way of example only.

Individual designs are created and calculated according to the technical requirements of the application. Countless applications are possible in principle, and not all of them can be presented. Give your imagination free rein. If you have questions or if we can assist you with your ideas, please call us.

Ask us to check the design of your application for you. The results of this verification can be incorporated in your design work to help you find the best possible solution.

## LEANTECHNIK MOVEMENT OUT PASSION

Im Lipperfeld 7c 46047 Oberhausen, Germany

Phone +49 (0)208 495 25 - 0 Fax +49 (0)208 495 25 -18

Email info@leantechnik.com www.leantechnik.com

Our products are subject to continuous further development. We reserve the right to make technical changes that support product improvements. © LEANTECHNIK AG / patented and utility patent no. 296 15 825.9. Reproduction of any kind, in whole or in part, requires our written permission.

#### References (sample)

	_	
	и	V
7	ш	۸

ABB Automation GmbH

ABB Engineering Shanghai Ltd.

ADAM OPEL AG

AP&S International GmbH

A-Tooling Ab, Sweden

**AUDI AG** 

Benteler AG

BLEICHERT Automation GmbH & Co.KG

BMW AG/Group Ltd.

Braun GmbH

Carl Zeiss Jena GmbH

CMC S.r.l.

Continental Reifen Deutschland GmbH

ContiTech Techno-Chemie GmbH

Daimler AG

Dambach Lagersysteme GmbH

Dieffenbacher GmbH

#### Ε

EBZ Group

Eissmann Automotive Deutschland GmbH

Emil Bucher GmbH & Co.KG

Festo AG & Co.KG

FFT EDAG Produktionssysteme GmbH & Co. KG

FLABEG Deutschland GmbH

Ford of Europe GmbH

Ford Motor Company of Australia Limited

Ford Motor Company U.S.

#### G

Gehring Technologies GmbH

Goodyear Dunlop Tires Operations S.A.

GROB-Werke GmbH & Co.KG

#### Н

Herrhammer GmbH

Hörmann Automotive Gustavsburg GmbH

Ideal-Werk C. + E. Jungeblodt GmbH + Co. KG

Illig Maschinenbau GmbH & Co. KG

Ilsemann Automation

Inductoheat Europe GmbH

IWM Automation GmbH

Johnson Controls Autobatterie GmbH & Co. KGaA

Julius Blum GmbH

#### K

Kolb Technology GmbH

KUKA Flexible Manufacturing Systems (Shanghai)

Co., Ltd.

KUKA Roboter GmbH

KUKA Systems GmbH

leantechnik@ya.ru

Liebherr Group

Manz Automation AG

Miele + Cie. KG

Muhr & Bender KG

Müko Maschinenbau GmbH

Müller Weingarten AG

Neue Halberg-Guss GmbH

Olbrich GmbH

OPTIMA packaging group GmbH

Otto Bihler Maschinenfabrik GmbH & Co. KG

Papier-Mettler

Pintsch Bamag Antriebs- & Verkehrstechnik GmbH

Porsche AG PSF AG

#### R

RENAULT s.a.s

Robert Bosch GmbH

Saint-Gobain PAM Deutschland GmbH

Schaefer Förderanlagen- & Maschinenbau GmbH

Schuler Group

Siempelkamp GmbH & Co. KG

SK Hydroautomation GmbH

SLCR Lasertechnik GmbH

Sollich KG

Sturm Group

Thyssen Krupp Lasertechnik GmbH

Thyssen Krupp Steel AG

ThyssenKrupp System Engineering GmbH

TMS Transport- und Montagesysteme GmbH

Vacuumschmelze GmbH & Co KG

Voestalpine AG

Voith Industrial Services GmbH

Voith Paper GmbH & Co.KG

Voith Turbo GmbH & Co.KG

Volkswagen AG

#### W

Wafios AG

Wanzl Metallwarenfabrik GmbH

WICKERT Maschinenbau GmbH

Wieland-Werke AG

#### Z

Zasche Sitec handlings GmbH ZF Lenksysteme GmbH

#### **Generation 5**

#### lifgo® & lean SL® 5 - Rack-and-pinion gear unit

Generation 5 combines two gear unit concepts: the proven lifgo® and lean SL® series are now compatible. Each series has its strengths, and combining them could yield the optimal result for your lifting application.

lifgo® with linear guided gear racks, for fast and precise requirements

**lean SL®** with round gear rack guides, for simple lifting motions

**leantranspo**® is the name given to the partial and complete functional systems based on lifgo® and lean SI®

Thanks to the various possible combinations, countless types of system can be designed economically and efficiently. The logical, modular construction of the units results in a modular system that offers design engineers enormous flexibility and versatility in operation using just a few accessories. This modular system comprises all the components required for the construction of simple lifting systems through to complex transfer and shuttle solutions – in proven **LEANTECHNIK AG** quality.

#### lifgo® • Unique features

#### One basic model – 4 variants

lifgo®, lifgo® linear, lifgo® double and lifgo® linear double based on the same basic model – replacement, expansion and flexible design can all be carried out on your system easily.

#### 4-way roller guide for the gear rack on lifgo®

This design allows higher loads and lower operating noise levels.

#### Adjustable precision with eccentric configuration

In the "Excent" design, you specify the tooth backlash and gear precision yourself.

#### High resisting torque for more transverse force bearing capacity

lifgo® 5 can support greater transverse loads, thanks to its higher resistance torque.

#### Four standard pinion shafts for creative system designs

Four standard pinion shafts – profile (PVV), one or two pins (ZA 1/ZA 2), and a bore with keyway (FFN) – are available for all sizes of lifgo® and lean SL®.

#### Long service life for durable use

lifgo® 5 stands for quality and guarantees reliable functionality.

#### Gear rack protection – simple and flexible

Environments with high levels of contamination or dust call for the use of a gear rack protection with a simple, secure screw-type fixing mechanism that permits versatile use.

#### Simple installation with few accessories

Thanks to the modular system design, only a small number of accessories are required to install the lifgo® 5. This simultaneously reduces the cost to the user.

#### More options thanks to flexible mounting

lifgo® 5 has fixings on 4 sides. It can therefore be installed on all horizontal and vertical surfaces.

#### Compatibility for flexible design

lifgo® and lean SL® are compatible – the two gear unit series can be combined in one and the same system.

www.leantechnik.com



#### **Generation 5**

#### lean SL® • Unique features

#### Large diameter, wide tooth profile

A large rack diameter and wide toothing mean the lean SL® series guides particularly stiffly and has a long service life.

#### Long service life for durable use

The lean SL® is a robust gear unit that is characterised by its long service life.

#### Easy-to-install, versatile gear rack protection

The lean SL® is simple to handle and can be used in almost any industry.



lean SL®

#### More options thanks to flexible mounting

lean SL® has fixings on 4 sides. It can therefore be installed on all vertical and horizontal surfaces.

#### leantranspo®- partial and functionally complete systems • Unique features

#### Unlimited possibilities

The leantranspo production line includes the development and construction of partially and functionally complete systems based on lifgo® and lean SL®. Any time attachments, motors and steelwork is used in addition to the two gear unit series, a leantranspo® system is made from the component sets.

#### Professionalism and experience

Profit from our engineering team's years of experience – they are here to advise you in your development and construction needs.

#### Custom solutions

leantranspo® means tailored solutions designed especially for you so that they meet your needs precisely.

## Our construction kit system



## & individual, handy application gear units



lean SL® 5.5




lifgo® 5.1



lean SL® 5.m



# **Function & Combination**

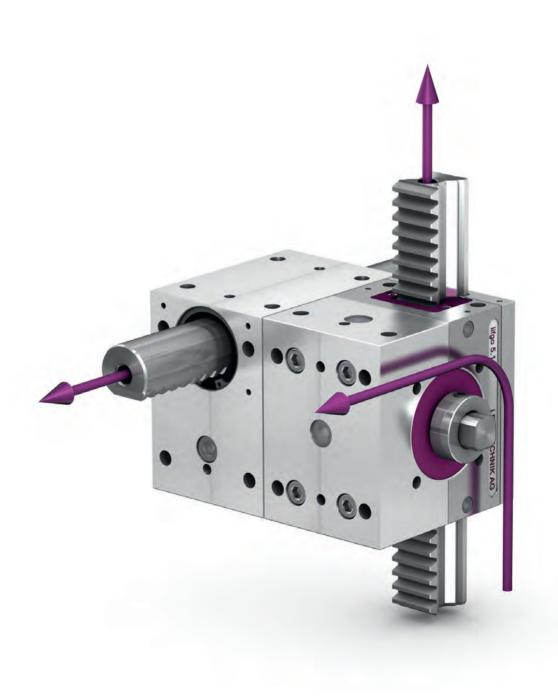

#### **Function & Combination**

#### Introduction to functionality

lifgo® and lean SL® are two gear unit series offering different performance levels. They are both available in three different sizes.

lifgo®Lifting, guiding, and positioning. Fast, precise, and powerful.

lean SL® Gear units for simple, cost-effective lifting devices

Both gear unit types can be combined with each other. They are compatible with one another and support each other's functions. The differences and similarities of the two series, lifgo® and lean SL®, are presented on the following pages.

#### lifgo® & lean SL® • Differences



The most important differences between lifgo® & lean SL®:

lifgo® lean SL®

• 4 roller guides • sliding guide bearings

• precise guides • simple guiding

• high-precision positioning • simplified precision positioning

• high lifting speed

• also available as "linear", "double" and

"helical"


lifgo® & lean SL® • Similarities




The most significant similarities between the lifgo® and lean SL® gear unit series:

- · Identical connection dimensions and screw mounts for each size
- · Identical tooth pitch (to)/module and pitch diameter for each size
- · Identical pinion shaft designs for each series and size
- · Screws can be threaded in directly and/or passed through
- · Gear units can be installed on horizontal and vertical surfaces
- · Mounting screw dimensions are the same in vertical and horizontal orientation

lifgo® & lean SL® • Rotationally fixed, interlocked connection with profile shafts (PW)

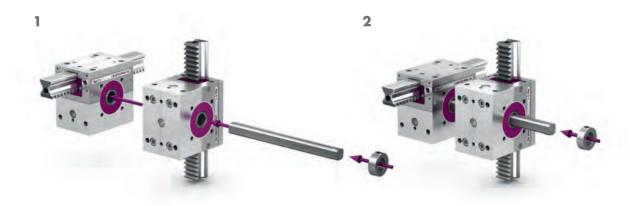



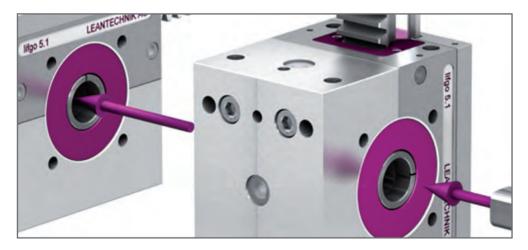

Our profile shafts create a rotationally fixed and interlocked connection between the pinion for the horizontal gear racks and the pinion that drives the vertical gear rack. Linear horizontal motion is therefore converted to a linear vertical motion in a 1:1 ratio. The ratio (mm/ $360^{\circ}$ ) is different for each gear unit size (Fig. 1-3).


By sliding in the gear rack horizontally, the rotary motion is transmitted to the profile shaft by means of the pinion shaft (Fig. 4). The profile shaft synchronises the tooth position of the gear units in 90° steps. To do this, the gear unit must be positioned using the position markings on the pinion (image 5) and then the two must be connected with the profile shaft in this position. As a result, the gear rack positions are also synchronised (simultaneous engagement of the gear racks with the pinion shaft is a prerequisite.)

#### lifgo® & lean SL® • Pinion shaft ends

In addition to profile shafts (PVV) as a rotationally fixed connection, the lifgo® & lean SL® modular system offers three more standardised pinion shaft ends.

These include the pinion shafts with pins and a keyway, in versions with one pin (ZA 1) or two pins (ZA 2). A hollow shaft with a keyway (PFN) has also been standardized. The dimensions are the same for all lifgo® and lean SL® versions, for each size. They can be found on the dimension sheets.

The keyway and pin versions are particularly well suited for dynamic, low-clearance, and alternating load motions.

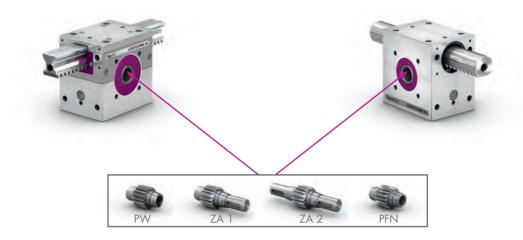

lifgo® double & lean SL® double• Gear units with two racks




lifgo® double & lean SL® double with parallel rack guides in each size. For use in gripper devices and gripper shuttle systems, for example.


#### lifgo® • Special features

The lifgo® 5 gear unit series meets high standards, and has a few technical features and versions that the lean SL® double series do not provide:

#### lifgo® Excent: Tooth backlash configurable (both for straight-cut and helical gears)

In the lifgo® "eccentric" version, the tooth backlash can be adjusted. Indicate the desired positioning accuracy in the project data.





lifgo® linear: long travel, any number of gear racks

lifgo® becomes lifgo® linear: By removing the adapter plate and making a few small adjustments, lifgo® can also be used as a "linear" module. It very simply becomes the right drive unit for long travel strokes.



#### Applications:

Horizontal & vertical stroke: long travel with any number of multi-part gear racks

Vertical stroke: addition of reinforcement profiles at the tapped holes in the gear rack, and addition of auxiliary devices (e.g., suction pads, grippers, functional unit) at the end of the gear rack

## Positioning and combining the series

#### The four basic positions of the gear units









The sequence of pictures shows the basic assembly options in the horizontal and vertical direction. They are identical for lifgo® (top) and lean SL® (bottom). Note that both series can be combined with each other in all positions.

#### **Combinations of the series**

lifgo® + lean SL®



lifgo® linear + lean SL®



lifgo® linear + lifgo®



From high-precision to low-cost – compatibility between series reduces costs.

lifgo® double + lean SL® + lifgo® + lean SL® double + lifgo® linear



The above illustration shows all conceivable lifgo® and lean SL® gear unit combinations at a glance.

#### **Direction of rotation/operation**





Gear unit combinations basically convert horizontal linear motion into rotation, and then into vertical linear motion. The drive motion can take place in any effective direction (arrow). Reverse operation is also possible.

## Mechanical arrest system lifgo® & lean SL® (ASS)


The mechanical arrest system (ASS) is a mechanism that is mounted on the gear unit in order to prevent the uncontrolled descent of systems, system components or heavy weights and also to prevent the unwanted application of forces. It makes it possible to ensure that systems, machines or equipment do not descend suddenly or collapse during inspections or repair work. When used in combination with lifgo® or lean SL® gear units, the ASS can also be used as a positioning unit for a given value. Please ask us! For more information, see the PDF catalogue.



Mechanical arrest system locked



Gear unit moves the lift load



Mechanical arrest system unlocked



Gear rack moves the lift load

Aachen University tested and approved the ASS in November 2012.



#### The best functional safety

SHB safety brakes use the failsafe principle. Pre-tensioned cup springs press brake shoes onto the "waist" of the profile rail. The brake mechanism is designed for relatively large stroke and balances the profile rail manufacturing tolerances without losing braking force.

#### Mechanical clamping for safety

SHB safety brakes clamp very rigidly directly on the linear guide. This means they are directly applied to the mass that is being braked or held. Drive elements between the motor and masses to be moved, such as spindles, spindle nuts, shaft couplings or gear units therefore have no effect on safety.

#### Perfect for vertical axes

Direct clamping on the linear guide makes the SHB ideal for use in gravity-loaded axes where the risk to personnel needs to be minimised.

#### **High rigidity**

SHB safety brakes are more rigid than rod or band brakes by at least a factor of 3. Rotational motor brakes compare even less favourably. For one, they are usually subject to backlash, and for another, each element between the brake and the rail has a negative impact on rigidity.

#### **Switch condition monitoring**

An integrated proximity switch outputs a signal each time the brake's status changes.

## Stepless holding brake (SHB)

# Pressure booster for SHB high-pressure, pneumatic

HIGHLIGHTS AND SPECIAL FEATURES

In most cases, the pressure available in the compressed air system is not sufficient to operate the SHB at 20 bar. One possibility is increasing the overall system pressure, but this is a high-effort and expensive solution. Another solution is the use of a pressure booster in the system right where the higher pressure is needed.

The pressure booster increases the pressure in the system to the required operating pressure of the SHB by purely mechanical - pneumatic - means without introducing energy from outside.

- fast pressure boosting in front of the individual brakes
- no energy consumption after the output pressure is reached
- no electrical installation required
- simple, secure and economical operation
- no need to invest in your own high-pressure circuit or in a off-centre separate compressor system




Pressure booster on a plate



Pressure booster in a housing www.leantechnik.com



# **Applications & Examples**

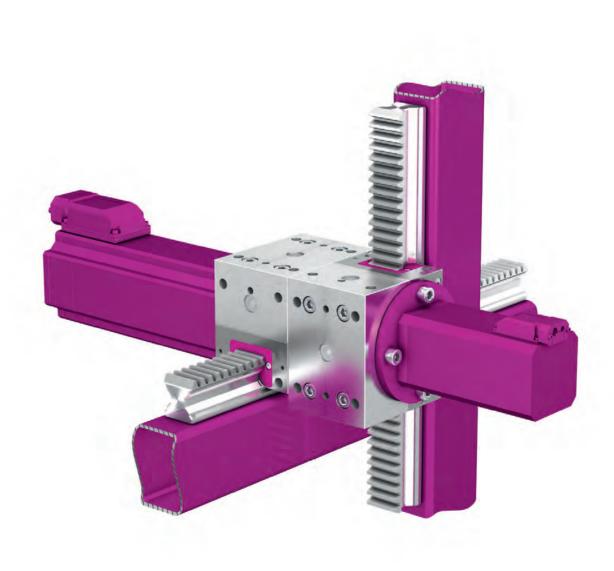

## **Applications & Examples**

#### Note on the presentation of the application examples

On the following pages, we present principal application and usage options for the lifgo® and lean SL® series

In order to achieve a uniform view of the many different applications, the gear unit size 5.1 was used for all the presentations. All applications shown can, of course, also be implemented in all sizes – with lifgo®, lean SL®, or a combination of the two series.



#### Explanation of the term "primary gear unit"


Note the role of the primary gear unit in the illustrations and applications. It distributes the drive forces acting on it within the lifting system, and does not perform any direct lifting, pushing, or positioning task itself.

The gear unit itself is no different from other gear units. The terminology refers solely to its location.

! The maximum permissible force transmission (= nominal force, in Newtons (N)) of an individual gear unit must not be exceeded!


For the systems shown below in this chapter, all lengths and distances as well as the lifting speed and load capacity can be freely selected.

#### Standard lifting system with lifgo® and air cylinder drive

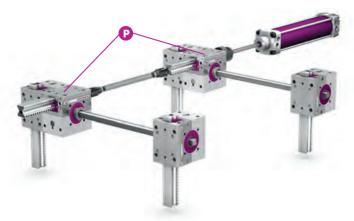

The two primary gear units from the lifgo® series each distribute half of the maximum potential force to the four gear units with vertical gear racks. The lifgo® gear racks bear supported loads, and can resist transverse forces.


#### Standard lifting system with four lean SL® units as vertical gear units

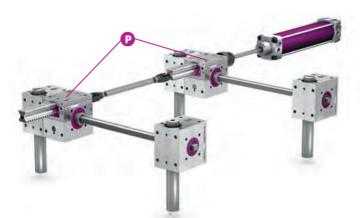

A plate or device bolted to the end faces of the gear racks ensures the vertical orientation of the gear racks in the real-life application.

Transverse forces are not permitted in this application


#### Lifting systems with four vertical and four primary gear units

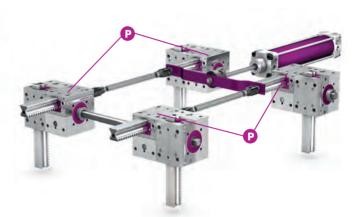

This system provides fourfold force transmission (depending on the size) to the vertical stroke. Non-centred loads can be supported here because a closed mechanical polygon is installed.


The maximum load at any given lifting unit must not be exceeded.

#### Lifting system with universal joints/primary gear unit®

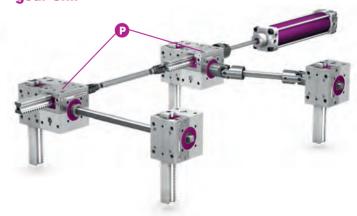


Lifting systems with four vertical and two primary gear units. The position of the gear unit for the rear axis can be varied via the universal joint.

# Lifting system with universal joints/primary gear unit lean SL®

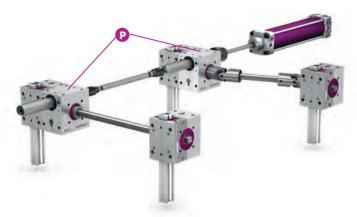

In this application, two lean  $SL^{\circledast}$  units are used as the primary gear unit. This results in a lower lifting force than in the previous application. Vertical guidance of the lift load is ensured by using the four lifgo $^{\circledast}$  gear units.

# Lifting systems with 4 vertical and primary gear units

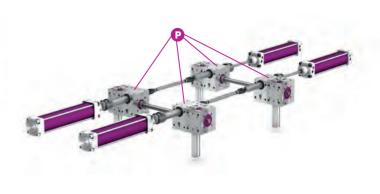


One air cylinder is connected to each of the lean SL® series primary gear units. In this application, four times the maximum nominal force can be generated. The gear units of the lean SL® series synchronise the force and motion of the air cylinders.

#### Lifting system with 4 lifting points



Combination of lean SL® primary gear unit and lifgo® gear unit. lean SL® works with lower lifting force than the same size lifgo® unit. This ensures high quality guidance and positioning with the vertical stroke implemented as a lifgo® unit, and low force transmission by the lean SL® unit.

# Lifting system with 3 primary gear units in series

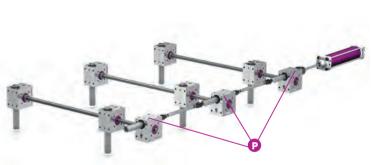

In this application, the horizontal gear racks of the lean SL® primary gear units function as "tie rods", as do the differential couplings.

#### lifgo® with built-in drive



The lifgo® pinion shaft is equipped with pins and a keyway. For precise positioning (horizontal/vertical), the drive motor is directly connected to the lifgo® pinion using a form-fit coupling. Used as a positioning and adjusting drive, the drive unit can also be used, for example, for pouring and tilting devices.

#### lifgo® lifting system in series



Lifting system and device for lifting long parts and profiles, for example. This application can also provide the vertical stroke in a single-row shuttle.

#### lifgo® pair with rotary reinforcement




Used in the same way as in the previous example. In this pair of lifgo® units, the rotational reinforcement transmits the rotary motion from the first to the second gear unit at the same position.

## Lifting system construction with lifgo® and lean SL®



The left side vertical gear units are from the lifgo® series, and function as a guide and transverse force support for any mounting plate. If two lifgo® gear units are sufficient when low transverse forces need to be supported, then lean SL® gear units (here the vertical gear unit on the right-hand side) can be used for other tasks.

#### Lifting system, standard configuration, large gear unit as tension drive

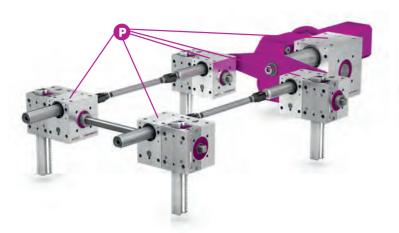

The large lifting unit used as a tension drive can come from the lifgo® series or lean SL®, depending on the force requirement (here lean SL®). Off-centre loads can be supported due to the closed force polygon and because maximum force and torque transmission are possible. The installation space in the centre remains available.

#### Lifting system, U-shaped with 2 distributor gear units



In this U-shaped application, the installation space in the centre remains free. The maximum torque Mt2 is the torque of the profile shaft on each side.



The maximum permissible rated force of a gear unit must not be exceeded!

#### Lifting system with 2 distributor gear units and one gear motor



Force transmission to the gear units is at a maximum. The installation space under any mounting plates can be used freely. Combined use of the lifgo® and lean SL® series is also possible in this application.


#### Circular arrangement of lifgo® gear units




This lifgo® application can be used for clamping and/ or centring round objects. The closure of round bodies (casings) is another potential application.

#### Arrangement in a rectangle/square

#### Arrangement of gear units in 4 rows

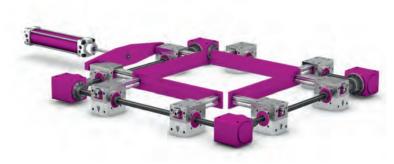


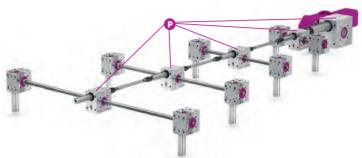

This application with lifgo® series gear units allows clamping and/or centring.

Arrangement as in the serial arrangement of gear units. In addition to the lean SL® gear units, lifgo® lifting units are now set up on both sides, in order to lift wide, guided mounting plates, for example.

#### Serial arrangement of gear units

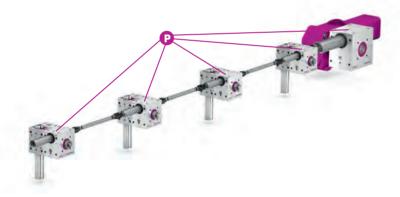

Please note that all the systems illustrated here are simply examples and that many other designs are possible.

This construction is used to lift long, narrow mounting plates, for example when lifting production parts into machine tools. A large lean SL® series gear unit is used here as the tension drive. The vertically oriented lifgo® gear units guide the mounting plate.

#### Lift columns

For the systems shown below in this chapter, all lengths and distances as well as the lifting speed and load capacity can be freely selected.

# Lift column as intermediate stacking unit with a lifgo® linear



This application with a lifgo® linear provides intermediate storage of flat products at various levels.

# Lift column – lift device with two lifgo® linear units and auxiliary guides



Lifting forks are directly installed on the lifgo® linear unit. Various useful auxiliary elements can be installed. Our lift columns are also available with counterweights.

#### Lift columns with auxiliary guides



Precise guidance for lift operations with high and off-centre loads. The application allows high loads and a large transverse force capacity. It is suitable, for example, for precise lifting and positioning of loads and production devices.

# Lift column with reinforcement profiles on the lifgo® linear gear rack



Lift column with particularly rigid design, for lifting heavy parts/fixtures in assembly lines, such as for the final assembly of front axles with engine/transmission in the automotive industry. Large stroke heights, high transverse force capacity and positioning accuracy.

## leantranspo® • Transfer, handling, pick & place

For the systems shown below in this chapter, all lengths and distances as well as the lifting speed and load capacity can be freely selected.

#### Horizontal drive with built-in vertical drive



Representation of a transfer function. For the horizontal drive (X or Y stroke), a lifgo® linear unit with linear gear rack is placed on the carrier. The drive "comes along". A lifgo® linear unit is mounted on it for the Z-stroke.

#### 2-axis portal, variable



2-axis transfer with lifgo® linear for each axis. Grippers, clamps, vacuum devices, or other auxiliary devices can be installed at the ends of the gear racks.

#### Portal for single-side access

# 1-axis transfer, linear axis, horizontal/vertical



1-axis transfer with lifgo $^{\otimes}$  linear. Very fast, large strokes, for transport from "A to B".



Compact 3-axis handling system with extendible support arm. Ideal for one-sided access. Compact, fast, precise, and low-vibration due to linear guide reinforcements.

## leantranspo® • Transfer, handling, pick & place

# 2-axis positioning table with auxiliary equipment on request



Standing 2-axis positioning table for high loads and fast travel speeds. A Z-axis or other accessories can be mounted. A suspended version is also possible.

# 3-axis positioning system (DAP) based on lifgo®



Flexible spatial movement thanks to lifgo® gear unit controlling 3 axes. Components are picked up and clamped at the top end of the Z-axis. The system is able to support transverse forces and process forces. It is suitable for use, for example, in production lines in the automotive industry. The DAP makes it possible to manufacture chassis frames of different sizes and shapes on one and the same production line. To do this, the distances between the pick-up points are adapted automatically for each chassis frame. For an illustration of the functioning of the system, you can also watch the video on our website.

## AFP (Actuator Flexible Position) -



The LEANTECHNIK system construction kits
Our AFP axes are designed to flexibly position brackets,
tensioners, centring devices and much more.

They can be used to mount different components, such as chassis parts.

The system construction kits consist of a longitudinal axis, transverse axis, lifting axis and drive units.



freely selectable motor position



universal accessory selection



extremely compact design

You can find more information in our PDF catalogue

## leantranspo® • Transfer, handling, pick & place

#### 2-axis portal with 2 vertical axes

#### 2-axis transfer with gripper function



Portal with two lifgo® linear units and an additional lifgo® guide. Two lifgo® units are installed on it for the Z-axis. Auxiliary devices are installed at the ends of the gear racks.

4-axis system with rotary head and suction pad

Standing 2-axis transfer part feeder. A horizontal stroke axis, a gripper or closing axis, synchronous on both sides toward the middle. Can be used as a stepped conveyor. Also available as a 3 axis transfer with horizontal and vertical stroke and synchronous closing axis.



4-axis "pick & place" system with linear motion. The fifth axis is used as an off-centre rotary axis with a suction pad or magnet. This application is used for picking up area-optimized pre-cut parts (sheet metal, etc.) and for the accurately aligned stacking of the parts on the opposite pallet.

#### leantranspo® • Shuttle & Transfer

For the systems shown below in this chapter, all lengths and distances as well as the lifting speed and load capacity can be freely selected.

#### 1-rail shuttle, hanging, 2-axle drive



Suspended 1-arm shuttle. The gear rack and lifgo® linear unit are suspended below the beam for the horizontal drive. The assembly and second lifgo® for the Z-stroke are mounted on it. Grippers, suction pads, or other devices can be installed on the suspended standard aluminium profile.

#### 1-rail shuttle, standing, 2-axle drive



lifgo® gear units are oriented vertically in the Z direction, connected and synchronised by means of the rotary axis. Rotary reinforcements ensure precise angular synchronicity. A lifgo® linear unit with an additional lifgo® guide car is mounted on it, in order to be able to move the profile beam reversibly in the X or Y direction. This creates a 2-axis reversing shuttle.

# 1-arm shuttle, suspended, 2-axis drive with5 gripper stations



The horizontal stroke is suspended. In contrast to the previous example, the vertical stroke has been designed so that a second lifgo® lifting unit is installed in the horizontal direction next to each vertically oriented unit.

The gear units are each connected and synchronised by a profile shaft. In the horizontal direction, a tensile force acts on the gear racks and causes the pinion to rotate. This force is transferred to the vertical lifgo®, and the rotation is redirected again into a linear motion (vertical in this case).

## 2-arm shuttle, standing, 2-axis external drive




Designed as a 2-axis transfer shuttle with externally mounted drives. The system can also be designed as a 3-axis transfer gripper shuttle.

#### leantranspo® • Complete systems

For the systems shown below in this chapter, all lengths and distances as well as the lifting speed and load capacity can be freely selected.

Sorting system with lifgo® and third-party components

lifgo® Gantry system 3-axle gripper arm and 2-axis palletiser

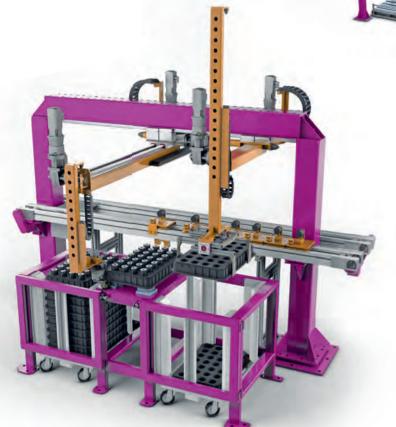

Complex sorting system ,including controls and logistics, for stacking sorting boxes in a storage area. The system was completely designed, built, and assembled.


Complex combination of palletiser and feed mechanism. The movements of the two arms are harmonized with one another. The 3-axis gripper arm takes the blanks from the left-hand stack, places them on the conveyor and returns a finished part to the blister pack. The 2-axle palletiser moves the blister to the 3 different positions and has been designed with lifgo® double gear units and two lifgo® linear gear units. Gripper jaws are attached to the ends of the lifgo® double gear units and transform the gear units into gripper modules. The system was completely designed, built, and assembled.

#### leantranspo® • Complete systems

#### lean SL® Lifting table



lifgo® Precision lifting table

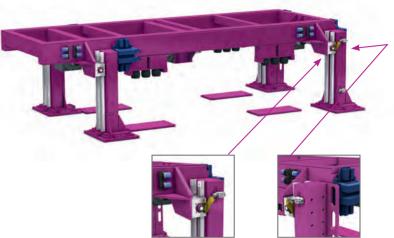

Application for high loads with high positioning and repeat accuracy. Precise guidance and maintenance of position during the stroke are required. Safety pegs, central lubrication, and damping are used as auxiliary equipment here. Synchronicity is maintained by a central drive.

Lift table for high loads with high repeat accuracy. Loose guidance to prevent overdefinition, for example during centring tasks. A lift table consists of two double columns, each of which is equipped with two lean SL® gear units and, in the configuration illustrated here which uses size 5.3 gear units, is able to lift 1800 kg, for example.

Please note that all the systems illustrated here are simply examples and that many other designs are possible.

lifgo® linear transfer – 17 meters, with gripper stations



Partial transfer system with lifgo® linear for the horizontal stroke. Scope includes steel construction, assembly, operational testing, and final installation. The grippers take parts from the transfer and dip them into process baths for further processing. Used in the chemical industry.

## leantranspo® • Complete systems

#### **Lifting-lowering conveyor (HSF)**



Lifting table meets skid conveyor

To transport chassis as efficiently as possible, in the lifting-lowering conveyor, we combine a skid system with two of our lifting columns. The construction lowers, lifts and conveyor heavy loads – and not just in automotive construction.



HIGH PRECISION

The lifting-lowering conveyor works with very high precision and positions chassis with consistent accuracy.



HIGH LIFTING SPEED

With its compact design, the lifting-lowering conveyor moves components in seconds.



FLEXIBLE DESIGN

The slim steel construction of the lifting-lowering conveyor is designed to be flexible and save space.

## **Project questionnaire**

## Do you already have a specific project in mind?


On our website at: www.leantechnik.com/kontakt/projektfragebogen you will find a project questionnaire.

Using this questionnaire, we can find out some important information from you ahead of time.

If you already have a project with some key data, we can use this project questionnaire to more quickly help you find a solution and offer you a product to meet your needs.

We look forward to hearing from you.

## Your ideas are our challenges!

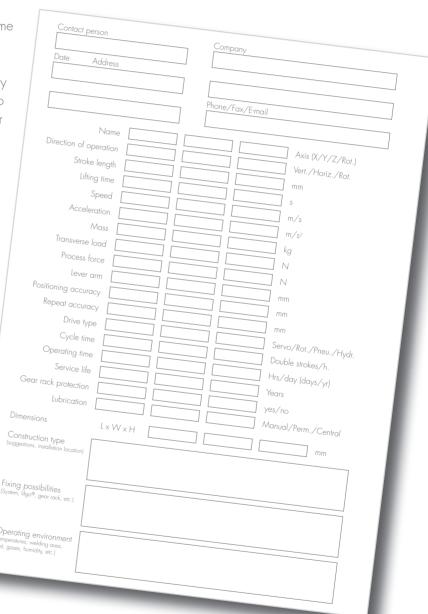

### **Application gear units**

#### Individual demands, precise solutions

LEANTECHNIK offers a multitude of different hoist gears for a wide range of applications. If your project cannot be implemented with the gear units in out standard portfolio, please contact us.

#### We will develop a gear unit tailored to your needs at a great price!

Since it was founded, LEANTECHNIK AG has designed tailored solutions for a range of customers.

#### **Example situations for bespoke gear units:**

- Extreme loads
- Specific materials
- Specialised finishes
- Special dimensions
- Unusual environmental conditions

Some solutions meet demands that we have never encountered at LEANTECHNIK, but are suitable for the needs of a new, wider customer base. Developments like these find their way into the LEANTECHNIK AG's standard range.

#### Your ideas are our challenges!

#### Microchips and kettle chips

LEANTECHNIK AG's gear units have always been moved by a wide range of components and products. This flexibility allows us to address customers from both the semiconductor and the food industry, for example. This has led to the development of the extra-small lean SL® 5.m. In an environment requiring the highest precision and the highest level of purity, it runs permanently and reliably with the lowest possible particle emissions.

#### Different dimensions, the same precision

Our lean  $SL^{\otimes}$  5.5 was first designed for the extreme environment of a nuclear reactor. The requirements brought to us were therefore extraordinary in all respects. The lean  $SL^{\otimes}$  5.5 has since then served not only in the combustion chamber of a nuclear facility, but has taken on many other heavy-duty tasks in the industry as well.

Does your project have very special requirements?

Are you unsure whether you can use gear units from LEANTECHNIK AG?

Our engineers will find a way to develop and build gear units or a 'partial system', which we call lean-transpo®, to meet your requirements.



lean SL® 5.5



lean SL® 5.m



# lifgo®& lean SL®

## **Technical Data**



## lifgo® & lean SL® • Technical Data & Dimension Sheets

#### **General**

Technical data in an overview of all standard gear unit types and the different variants are listed below. You can find the details in our PDF catalogue online. Please observe the important notes on the use of lifgo® and lean SL® gear units on this page. They apply to all types of gear units and accessories.

Specific notes on the individual gear units or accessory components, and their associated technical data and illustrations, are found on the corresponding page.

- lifgo® & lean SL® can be combines or used as replacements for each other.
- The lifgo®/lean SL® pinion connections are identical. Force transmission is unequal!
- Iifgo® & lean SL® have the same accessories, and identical interfaces and dimensions.
- All gear units have centring points for installing adapter discs for mounting gear unit motors.
- 1 We carry profile shafts as accessories for synchronisation and rotationally rigid connection. For the pin (ZA 1/ZA 2) and keyway (PFN) versions, couplings and connectors must be configured on a project-specific basis.
- The total lifting force is made up of the weight and acceleration force.
- In the case of vertically oriented gear racks, their own weight plus that of the mounted parts must be taken into consideration.
- Note the maximum permissible transverse force moments of the lifgo® gear unit.
- lean SL® gear units cannot support any transverse forces.
- The lifting force and torque transfer of the primary gear unit must not be exceeded.
- Make sure that the system documentation addresses the initial and maintenance lubrication of the gear units and that lubrication at the site is ensured.
- ① Only one plug may be removed for lube holes U, U1; all others remain installed to prevent grease from escaping.
- One grease nipple is threaded into each tapped hole U, U1, and tightened.
- Ensure that all lube holes remain accessible after installation.
- Note that the lifgo® gear rack guide and the pinion housing must be lubricated separately; in the case of lean SL®, they must be lubricated together.
- Make sure that the correct pinion shaft version is specified when ordering.
- Dobserve the maximum transmitted forces of the accessory components in the gear unit system.
- ① Observe the general rules of physics and mechanical engineering (VDMA) when configuring the system.
- All dimensions are shown in millimetres (mm).
- $\blacksquare$  The tolerance for the location of dowel holes is  $\pm$  0.02 mm for all gear units.
- For safety reasons, request the theoretical service life of your application.

## lifgo® 5 • Technical Data

#### lean SL® Series • For technical data and details, see PDF catalogue



lifgo®



lifgo® double



lifgo® linear



lifgo® linear double

Make sure that the article number refers to the correct pinion shaft version.



(see cover page)

- 1 The technical data on this page apply to all versions of the lifgo® series (lifgo®, lifgo® linear, lifgo® double, lifgo® linear double and eccentric version).
- Breakaway force for new, unlubricated gear rack guides is 30N per lifgo® unit. This value drops to near zero after the run-in phase.
- The breakaway force of hardened gear racks is approximately 80N.
- The pretensioning of guide cars is 2%.

lifgo® series technical data		Unit	5.0	5.1	5.3	5.4
Lifting power	F <sub>max</sub>	Ν	2000	3800	15900	25000
Lifting speed	Vmax	m/s	3	3	3	3
Acceleration	amax	$m/s^2$	50	50	50	50
Torque	Mmax	Nm	20	76	477	1000
Pitch diameter	Ø pt.	mm	20	40	60	80
Lifting gear ratio		mm/360°	62.8318	125.6637	188.4955	251.3274
Efficiency	h		0.92	0.92	0.92	0.92
Temperature resistance	t	°C	-10 to +80	-10 to +80	-10 to +80	+80
Static torque	Mtx stat.	Nm	570	760	4400	5500
Dynamic torque	Mtx stat.	Nm	280	390	2200	2800
	Mty stat.	Nm	380	650	3300	3300
	Mty dyn.	Nm	180	330	1600	1600
	Mtz stat.	Nm	380	650	3300	3300
	Mtz dyn.	Nm	180	330	1600	1600
Static load rating	F stat.	Ν	38400	51200	161400	161400
Dynamic load rating	F dyn.	Ν	19100	25900	79600	79600

## lifgo® SVZ • Technical data

#### lifgo® Helical SVZ Series • For technical data and details, see PDF catalogue



lifgo® SVZ



lifgo® linear SVZ



lifgo® double SVZ



lifgo® linear double SVZ

Make sure that the article number refers to the correct pinion shaft version.



- (see cover page)
- 1 The technical data on this page apply to all versions of the lifgo® series (lifgo®, lifgo® linear, lifgo® double, lifgo® linear double and eccentric version).
- Breakaway force for new, unlubricated gear rack guides is 30N per lifgo® unit. This value drops to near zero after the run-in phase.
- 1 The breakaway force of hardened gear racks is approximately 80N.
- ! The pretensioning of guide cars is 2%.

lifgo® SVZ Series technical data		Unit	5.1	5.3	5.4
Lifting power	F <sub>max</sub>	Ν	3400	14400	22600
Lifting speed	Vmax	m/s	3	3	3
Acceleration	amax	$m/s^2$	50	50	50
Torque	Mmax	Nm	67.15	428.40	898.35
Pitch diameter	Ø pt.	mm	39.5	59.5	79.5
Lifting gear ratio		mm/360°	124.0929	186.9248	249.7566
Efficiency	h		0.92	0.92	0.92
Temperature resistance	t	°C	+80	+80	+80
Static torque	Mtx stat.	Nm	760	4400	5500
Dynamic torque	Mtx stat.	Nm	390	2200	2800
	Mty stat.	Nm	650	3300	3300
	Mty dyn.	Nm	330	1600	1600
	Mtz stat.	Nm	650	3300	3300
	Mtz dyn.	Nm	330	1600	1600
Static load rating	F stat.	N	51200	161400	161400
Dynamic load rating	F dyn.	Ν	25900	79600	79600

### lean SL® 5 • Technical data

#### lean SL® Series • For technical data and details, see PDF catalogue



• Make sure that the article number refers to the correct pinion shaft version.



(see cover page)

• The performance data listed apply to both the lean SL® and lean SL® versions of each size.

The frictional forces in the bushings increase due to torques. This leads to reduced efficiency and increased wear of the bushings (sliding bearings). Please note that this means that a greater driving torque will be required.

lean SL® Series technical data		Unit	SL 5.m	SL 5.0	SL 5.1	SL 5.3	SL5.5
Lifting power	F <sub>max</sub>	Ν	300	800	2000	8000	25000
Lifting speed	V <sub>max</sub>	m/s	0.6	0.6	0.6	0.6	0.6
Acceleration	a <sub>max</sub>	$m/s^2$	30	30	30	30	30
Torque	$M_{\text{max}}$	Nm	3	8	40	240	1200
Pitch diameter	ø pt.	mm	12	20	40	60	96
Lifting gear ratio		mm/360°	37.6991	62.8318	125.6637	188.4955	301.5929
Efficiency	η		0.8	0.8	0.8	0.8	0.8
Temperature resistance	t	°C	+100	-10 to +100	-10 to +100	-10 to +100	+100
Static torque	Mt <sub>x</sub> stat.	Nm	0	0	0	0	0
Dynamic torque	Mt <sub>x</sub> dyn.	Nm	0	0	0	0	0
	Mt <sub>y</sub> stat.	Nm	100	200	400	2000	7000
	Mt <sub>y</sub> dyn.	Nm	9	18	22	150	800
	$Mt_z$ stat.	Nm	250	500	1000	4000	15000
	Mt <sub>z</sub> dyn.	Nm	25	50	110	700	4500

## lifgo®/lifgo® SVZ/lean SL® racks

#### lifgo® gear racks 5.0 - 5.4

#### lifgo® Racks SVZ 5.1 - 5.4

The gear rack bears guide loads. It is subjected to tensile, compressive, and transverse forces. Note the moments of inertia and the torque loads on the gear units. The gear rack is symmetrical in construction.





#### lifgo® linear racks 5.0 - 5.4

lifgo® linear racks SVZ 5.1 - 5.4

The gear rack bears guide loads. It is subjected to tensile, compressive, and transverse forces. Note the moments of inertia and the torque loads on the gear units. The gear rack is symmetrical in construction. Reinforcement profiles and/or feed lines can be fixed and routed using the tapped holes at the rear.





#### lean SL® gear racks 5.m - 5.5

lean SL® series gear racks are supported in sliding bushings. They are designed to transfer tensile and compressive forces. They cannot bear transverse forces.



#### 3D data and formats

We offer all the products in this brochure and many other products in our CAD catalogue for download from our website www.leantechnik.com.

#### CAD product catalogue from LEANTECHNIK - free download

In our configurator, we offer CAD models for many LEANTECHNIK products to download for free.

The download portal is based on the PARTcommunity technology from the software manufacturer CADENAS GmbH

The models have all the relevant information you need to incorporate our gear units into your plans.

#### Simple handling and easy integration into your system

With just a few clicks, download the CAD models you want in any common CAD format directly from the LEANTECHNIK product catalogue, import it into your CAD system and then integrate it into your design.

#### We will support you from the planning phase

The reduction of process times is a central concern for us. Our intention to enable you to find the right gear unit for your purposes.

#### Service is number 1

If there are any problems when using the system or if you have any questions, do not hesitate to contact us.

#### https://leantechnik.com/service/cad-daten/

Delivery and payment (for products and services) are carried out on the basis of our general terms and conditions of sale and delivery. Our service conditions apply to the services we provide. All documents can be found at www.leantechnik.com. We are happy to send you the documents at your request.

Our full PDF catalogue in its latest version with links to information on 3D models, as well as dimension sheets and accessories, can be found at:

www.leantechnik.com

## Notes

Notes

## Notes